





Hybrid Rotary Stepper Motor Size 34

87H2 (2 PHASES 1.8°)

MODEL	HOLDING TORQUE (Nm)	CURRENT A / PHASE	RESISTANCE Ω / PHASE	STEP ANGLE	ROTOR INERTIA gfm ²	WEIGHT (kg)	MOTOR LENGTH L (mm)
87H2060-30-4A	2.8	3.0	1.1	1.8°	1000	1.7	60
87H2060-45-4A	2.8	4.5	0.5	1.8°	1000	1.7	60
87H2060-60-4A	2.8	6.0	0.3	1.8°	1000	1.7	60
87H2080-30-4A	4.4	3.0	1.5	1.8°	1600	2.4	80
87H2080-45-4A	4.4	4.5	0.65	1.8°	1600	2.4	80
87H2080-60-4A	4.4	6.0	0.4	1.8°	1600	2.4	80
87H2120-30-4A	8.4	3.0	2.3	1.8°	3200	4.0	120
87H2120-45-4A	8.4	4.5	1	1.8°	3200	4.0	120
87H2120-60-4A	8.4	6.0	0.6	1.8°	3200	4.0	120
87H2160-40-4A	12.0	4.0	1.4	1.8°	4800	5.5	160
87H2160-60-4A	12.0	6.0	0.7	1.8°	4800	5.5	160
87H2160-80-4A	12.0	8.0	0.38	1.8°	4800	5.5	160

SIZE 34 - ROTARY STEPPER MOTOR

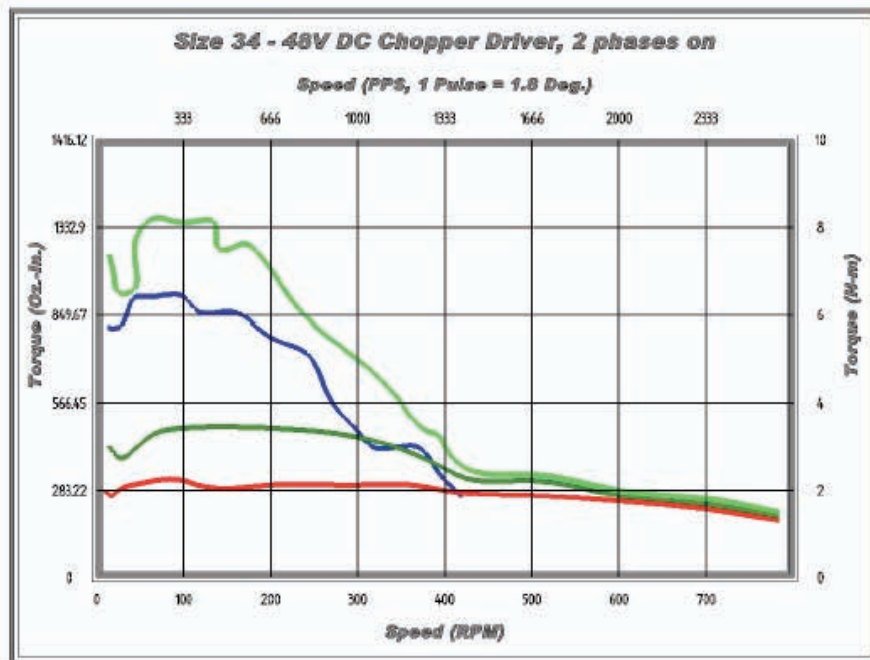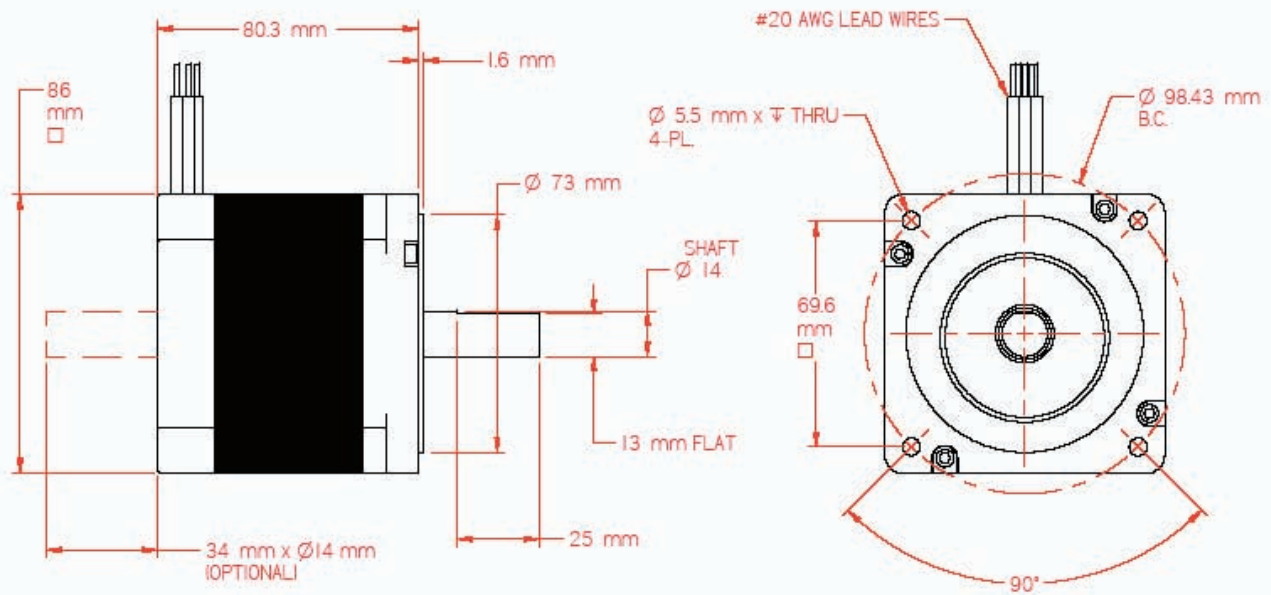

- = 87H2060-60-4A
- = 87H2080-60-4A
- = 87H2120-60-4A
- = 87H2160-60-4A